

C1 .001 Mfd Paper 600 V
 C2A Variable (Ant. Section)
 C2B Variable (Osc. Section)
 C3 Trimmer (Ant. 1500 Kc) on C2A
 C4 Trimmer (Osc. 1500 Kc) on C2B
 C5 100 Mmfd Mica
 C6A Trimmer (On Input Trans T1)
 C6B Trimmer (On Input Trans T1)
 C7 .05 Mfd Paper 400 V
 C8 .05 Mfd Paper 600 V
 C9 220 Mmfd Mica (Part of T2)
 C10 220 Mmfd Mica
 C11 .001 Mfd Paper 600 V
 C12 220 Mmfd Mica
 C13 .005 Mfd Paper 600 V
 C14 .01 Mfd Paper 600 V
 C15A 40 Mfd Filter Paper 150 V
 C15B 40 Mfd Filter Paper 150 V


R1 22,000 ohms 1/4 W
 R2 2.2 Meg 1/4 W
 R3 47,000 ohms 1/4 W
 R4 1 Meg Volume Control
 R5 22 ohms 1/2 W
 R6 10 Meg 1/4 W
 R7 .47 Meg 1/4 W
 R8 .47 Meg 1/4 W
 R9 150 ohms 1/2 W
 R10 1200 ohms 1 W

S1 Switch S.P.S.T. (Part of 82A)
 S Speaker P.M. 4" (Voice Coil
 D.C. Resistance 2.8 ohm)
 T3 Transformer Output
 T1 Transformer I.F. Input
 T2 Transformer I.F. Output
 L1 Loop Antenna
 L2 Oscillator Coil

ADDISON L2

ALIGNMENT PROCEDURE

Steps in Alignment	Test Oscillator			Receiver Dial Setting	Circuit to Adjust	Symbol on Schematic
	Connection to Receiver	Dummy Antenna	Frequency Setting			
1.	Control Grid 12SK7 Pin No. 4	.05 Mfd.	456 Kc.	No Signal 540-700 Kc.	2nd I.F. Transformer	Adjustable Iron Core
2.	Control Grid 12SA7 Pin No. 8	.05 Mfd.	456 Kc.	No Signal 540-700 Kc.	1st I.F. Transformer	C6A C6B
3.	Antenna Clip Back of Chassis	50 Mmfd.	1500 Kc.	1500 Kc.	Oscillator Trimmer	C4
4.	Antenna Clip Back of Chassis	50 Mmfd.	1500 Kc.	1500 Kc.	Antenna Trimmer	C3

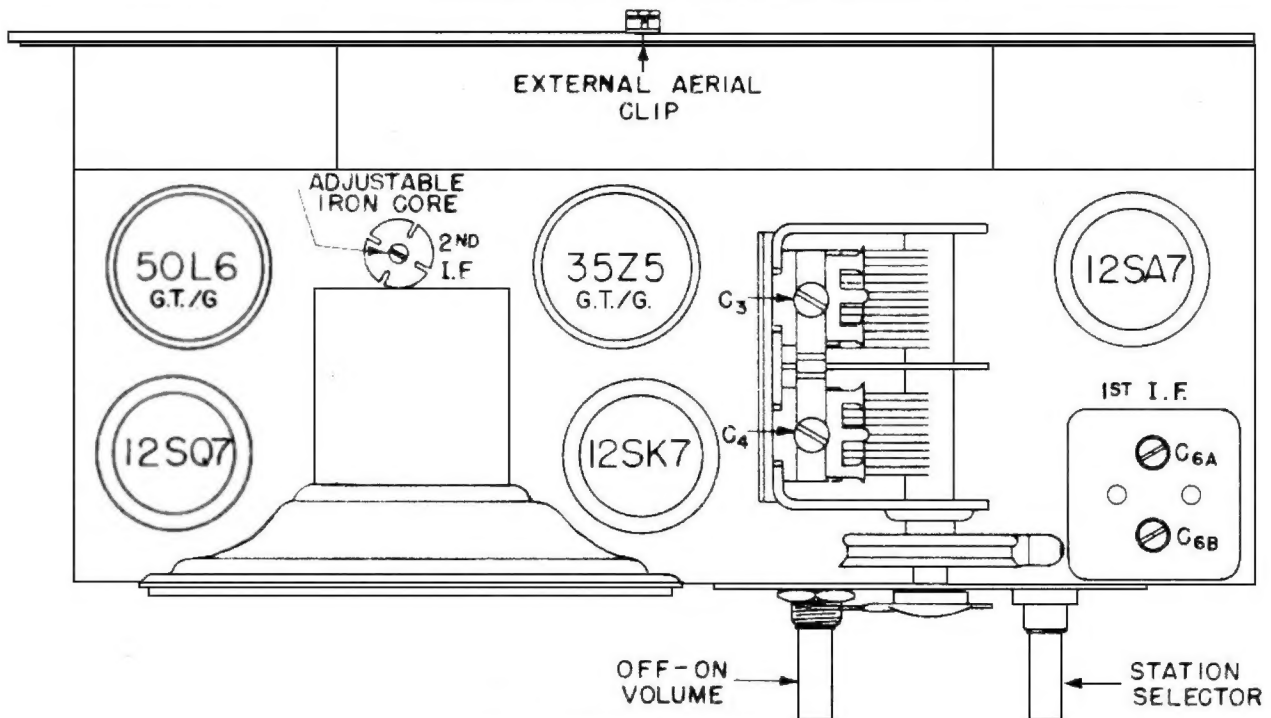

**ADDISON
L2**

